


1064nm 3-port Optical Circulator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing

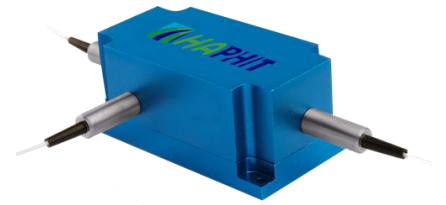


SPECIFICATIONS

Parameter		Unit	Value
Center Wavelength		nm	1064
Operating Wavelength Range		nm	+/-10
Insertion Loss@ 23 °C (1→2 or 2→3)	(Typ.)	dB	0.8
	(Max.)	dB	1.5
Isolation @ 23 °C (3→2 or 2→1)	(Typ.)	dB	25
	(Min.)	dB	22
Optical Return Loss		dB	≥45
Polarization Dependent Loss		dB	≤0.2
Fiber Type		-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load		N	5
Max. Average Optical Power		W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30, 50, 60, 80, 100
Max. Peak Power for pulse		kW	0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature		°C	0~50
Storage Temperature		°C	-10~65

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 5. Package size maybe different for different fiber type, optical power, etc.

DIMENSION DRAWING

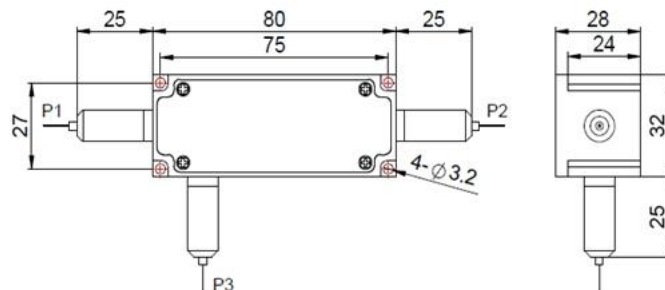

ORDERING INFORMATION (PN)

FCIR-	NNNN	-3H NN	P NN	- (NN)	- (C)	C	NN	- CC/CCC
<i>Center Wavelength</i>	<i>Average Power</i>	<i>Peak Power</i>	<i>Average Power P2</i>	<i>Fiber Type</i>	<i>Fiber Sleeve</i>	<i>Fiber Length</i>	<i>Connector Type</i>	
1064-1064nm	05-500mW	01-100W	1- 1W	E=10/125 SC Fiber	B= Bare fiber	05-0.5m	N=Without Connector	
	1-1W	1- 1kW	2- 2W	Q=20/130 DC Fiber	L= Loose Tube	10-1.0m	FC/APC=FC/APC Connector	
	5-5W	10- 10kW	5-5W	R=25/250 DC Fiber	2= 2mm Cable	15-1.5m	LC/PC=LC/PC Connector	
	20-20W	20-20kW	Blank for P2=P1	Blank for HI1060 Fiber	3= 3mm Cable	20-2.0m	SC/UPC=SC/UPC Connector	