

## High Power 3-Port Optical Circulator

### FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

### APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing




### SPECIFICATIONS

Configuration	Unit	3-port		
Working Wavelength	nm	1295-1325, 1470-1490 1530-1570, 1570-1610		
Insertion Loss	(Typ.)	dB	0.8	1.0
	(Max.)	dB	1.0	1.2
Isolation	(Min.)	dB	40	20
Optical Return Loss	dB	≥45		
Cross Talk	dB	≥45		
Polarization Dependent Loss	dB	≤0.20		
Fiber Type	-	SMF-28 Fiber or 10/130um DC Fiber (O) 12/130um DC Fiber (T) or 20/130um DC Fiber (Q) 25/250um DC Fiber (R) or 25/300um DC Fiber (G)		
Fiber Tensile Load	N	5		
Max. Optical Power (CW)	W	1, 2	3, 5, 10	
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package Dimension	Standard	mm	Φ5.5xL50	See Drawing
	Plastic Box Q	mm	L90xW20xH10	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
  2. To add connectors, IL is 0.3dB higher, RL is 5dB lower.
  3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

### DIMENSION DRAWING (≥3W)

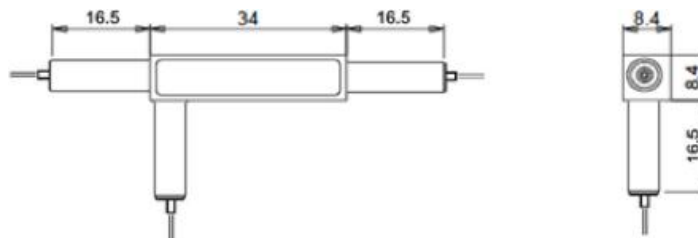

### ORDERING INFORMATION (PN)

FCIR-NNNN	-3HP NN	- (C)	(C)	C	NN	- CC/CCC
Center Wavelength	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1310-1310nm	1-1W	Q=Plastic Box Q	O=10/130 DC Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
1480-1480nm	2-2W	Blank for Standard	T=12/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
1550-1550nm	5-5W	or >3W Power	R=25/250 DC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector
1590-1590nm	10-10W		Blank for SMF-28 Fiber	3=3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector