

1553nm High Power Bandpass Filter

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Research Labs




SPECIFICATIONS

| Parameters | Unit | Value | |
|--|----------------------------|---|---|
| Center Wavelength | nm | 1553 | |
| Min. Pass Band Width @ 0.5dB | nm | 5.0 | |
| Insertion Loss over Pass Band Wavelength | dB | ≤1.2 | |
| Stop Band @ 25dB | nm | 1500~1548 & 1558-1610 | |
| ASE Direction | - | F: Forward, B: Backward, T: Two-way | |
| Configuration | - | D: 2-port, Y: 3-port, X: 4-port | |
| Optical Return Loss | dB | ≥50 | |
| Polarization Dependent Loss | dB | ≤0.1 | |
| Fiber Type | Input&Output | SMF-28 Fiber or 10/130um DC Fiber (O) 12/130um DC Fiber (T) or 20/130um DC Fiber (Q) 25/250um DC Fiber (R) or 25/300um DC Fiber (G) | |
| | ASE Guide Out (Y/X Type) | Same Fiber or MM Fiber | |
| Fiber Tensile Load | N | 5 | |
| Max. Optical Power (CW, ASE+Signal) | W | 1, 2, 3, 5, 10, 15, 20 | |
| Max. ASE Optical Power (CW) | W | 0.3, 0.5, 1, 2, 3, 4, 5, 10 | |
| Operating Temperature | °C | 0~70 | |
| Storage Temperature | °C | -40~85 | |
| Package Dimension | Stainless Steel Tube (SST) | mm | (Ø)5.5x35 (≤5W); (Ø)6.0x48 (5~10W) |
| | Metal Box | mm | (L)90x(W)12x(H)10 (>10W); (L)120x(W)12x(H)10 (≤10W) |

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower.
 - Suggest to use Y/X type or H Box if blocked optical power is ≥1W.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE H (FOR HIGH ASE POWER)

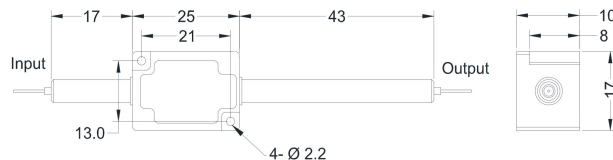

ORDERING INFORMATION (PN)

| Bandwidth | ASE Type | Fwd ASE Fiber | Bwd ASE Fiber | Optical Power | ASE Power | Package | Fiber Type | Fiber Sleeve | Fiber Length | Connector Type |
|-----------|-------------------|-------------------|--------------------------|---------------|-----------------|---------------|------------------------|---------------|--------------|-------------------------|
| 50=5nm | B=Backward | Y=Same Fiber | Y=Same Fiber | 1= 1W | 1= 1W | M=Metal Box | O=10/130 DC Fiber | B= Bare fiber | 05=0.5m | N=Without Connector |
| | T=Two-way | A=105/125um Fiber | A=105/125um Fiber | 5= 5W | 5= 5W | H=H Box | T=12/130 DC Fiber | L= Loose Tube | 10=1.0m | FC/APC=FC/APC Connector |
| | Blank for Forward | N=None | 5=50/125um Fiber | 10=10W | 10=10W | Blank for SST | G=25/300 DC Fiber | 2= 2mm Cable | 15=1.5m | LC/PC=LC/PC Connector |
| | | Blank for D Type | Blank for None or D Type | 20=20W | Blank for 300mW | | Blank for SMF-28 Fiber | 3= 3mm Cable | 20=2.0m | SC/UPC=SC/UPC Connector |

