

1554nm Bandpass Filter for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks




SPECIFICATIONS

Parameters	Unit	Value	
Center Wavelength	nm	1554	
Min. Pass Band Width @ 0.5dB	nm	6.0	
Insertion Loss over Pass Band Wavelength	dB	≤1.2	
Stop Band @ 25dB	nm	1500~1548 & 1560-1610	
ASE Direction	-	F: Forward, B: Backward, T: Two-way	
Configuration	-	D: 2-port, Y: 3-port, X: 4-port	
Optical Return Loss	dB	≥50	
Polarization Dependent Loss	dB	≤0.1	
Fiber Type	Input&Output	SMF-28 Fiber or 10/130um DC Fiber (O)	
		12/130um DC Fiber (T) or 20/130um DC Fiber (Q)	
		25/250um DC Fiber (R) or 25/300um DC Fiber (G)	
	ASE Guide Out (Y/X Type)	Same Fiber or MM Fiber	
Fiber Tensile Load	N	5	
Max. Average Optical Power (ASE+Signal)	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20	
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20	
Max. ASE Average Power	W	0.3, 0.5, 1, 2, 3, 4, 5, 10	
Operating Temperature	°C	0~70	
Storage Temperature	°C	-40~85	
Package Dimension	Stainless Steel Tube (SST)	mm	(Ø)5.5x35 (≤5W); (Ø)6.0x48 (5~10W)
	Metal Box	mm	(L)90x(W)12x(H)10 (>10W); (L)120x(W)12x(H)10 (≤10W)

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower.
 - Suggest to use Y/X type or H Box if blocked optical power is ≥1W.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE H (FOR HIGH ASE POWER)

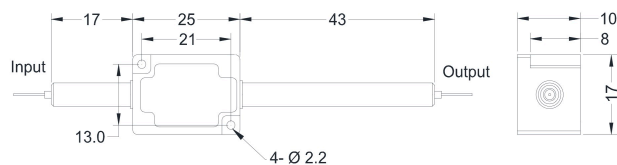

ORDERING INFORMATION (PN)

Bandwidth	ASE Type	Fwd ASE Fiber	Bwd ASE Fiber	Average Power	Peak Power	ASE Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
60-6nm	B=Backward T=Two-way	Y=Same Fiber A=105/125um Fiber	Y=Same Fiber A=105/125um Fiber	03=300mW 1= 1W 5= 5W	01=100W 1= 1kW 10= 10kW	1= 1W 5= 5W 10=10W	M=Metal Box H=H Box Blank for SST	0=10/130 DC Fiber T=12/130 DC Fiber G=25/300 DC Fiber	B= Bare fiber L= Loose Tube 2= 2mm Cable 3= 3mm Cable	05=0.5m 10=1.0m 15=1.5m 20=2.0m	N=Without Connector FC/APC=FC/APC Connector LC/PC=LC/PC Connector SC/UPC=SC/UPC Connector
	Blank for Forward	N=None	5=50/125um Fiber	20=20W	20=20kW	Blank for 300mW	Blank for SMF-28 Fiber				