

# 1064/1020-1150nm WDM Filter for Pulse Power

## FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

## APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks




## SPECIFICATIONS

Parameters	Unit	Value	
Pass Channel Wavelength Range $\lambda_1$	nm	1064 $\pm$ 4	1064 $\pm$ 1
Reflective Channel Wavelength Range $\lambda_2$	nm	1020 $\pm$ 10, 1030 $\pm$ 10, 1040 $\pm$ 10, 1080 $\pm$ 5 1092 $\pm$ 10, 1120 $\pm$ 10, 1150 $\pm$ 10	1053 $\pm$ 5, 1056 $\pm$ 2 1070 $\pm$ 2
Insertion Loss	Pass Channel@ $\lambda_1$	dB	$\leq$ 1.0
	Reflective Channel@ $\lambda_2$	dB	$\leq$ 0.8
Configuration	Y Type	-	3-port
	X Type	-	4-port (2x2 WDM)
Isolation	Pass Channel@ $\lambda_2$	dB	$\geq$ 25 (Standard) $\geq$ 45 (High Isolation)
	Reflective Channel@ $\lambda_1$	dB	$\geq$ 12
Optical Return Loss		dB	$\geq$ 45
Directivity		dB	$\geq$ 50
Polarization Dependent Loss		dB	$\leq$ 0.1
Fiber Type		-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load	N		5
Max. Average Optical Power	W		0.3, 0.5, 1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60
Max. Peak Power for pulse	kW		0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature	$^{\circ}$ C		0~50
Storage Temperature	$^{\circ}$ C		-40~85
Package Dimension	Stainless Steel Tube (SST)	mm	$\varnothing$ 5.5xL35 ( $\leq$ 5W); $\varnothing$ 6.0xL50 (5~10W)
	Metal Box	mm	L120xW12xH10 ( $\leq$ 10W)

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
  2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
  3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

## PACKAGE DIMENSION (> 10W)

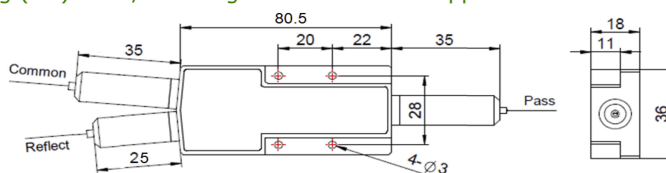

## ORDERING INFORMATION (PN)

Ref Wavelength	Pass Wavelength	Configuration	Isolation	Average Power	Peak Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
03=1039nm	06= 1064nm	X-X Type	I- High Iso	03=300mW	01=100W	M= Metal Box	E=10/125 SC Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
04=1040nm		Blank for Y Type	Blank for	1= 1W	1= 1kW	Blank for SST	Q=20/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
09=1092nm			Standard	10=10W	10=10kW	or >10W	R=25/250 DC Fiber	2=2mm Cable	15=1.5m	LC/PC =LC/PC Connector
12=1120nm				20=20W	20=20kW		Blank for HI1060 Fiber	3=3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector