

1570nm Bandpass Filter/Isolator Hybrid for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks



SPECIFICATIONS

| Parameters | Unit | Single Stage | Dual Stage | H Stage |
|--|----------------------------|---|--|---------|
| Center Wavelength | nm | 1570 | | |
| Min. Pass Band Width @ 0.5dB | nm | 4.0, 9.0, 15.0 | | |
| Stop Band @25dB | 4nm Bandwidth | 1520~1556 & 1574~1610 | | |
| | 9nm Bandwidth | 1520~1560 & 1580~1610 | | |
| | 15nm Bandwidth | 1520~1557 & 1583~1610 | | |
| Insertion Loss@23°C | dB | ≤1.3 | ≤1.5 | ≤1.8 |
| Signal Isolation (23°C) | dB | ≥25 | ≥40 | ≥20 |
| Configuration | D Type | - | 2-port | |
| | Y Type | - | 3-port, (Blocked Wavelength Guide Out) | |
| | X Type | - | 4-port, (Both Block Wavelength Guide Out) | |
| Fiber Type at 3 rd or 4 th Port (Y/X Type) | - | Same Fiber of other ports or 50/125um MM Fiber | | |
| ASE Direction | Forward Type | - | Bandpass Filter is before isolator | |
| | Backward Type | - | Bandpass Filter is after isolator | |
| | Twin Type | - | Bandpass Filter is at both sides of isolator | |
| Optical Return Loss | dB | ≥45 | | |
| PDL | dB | ≤0.2 | | |
| Fiber Type | - | SMF-28 Fiber or 10/130um DC Fiber (O) 12/130um DC Fiber (T) or 20/130um DC Fiber (Q) 25/250um DC Fiber (R) or 25/300um DC Fiber (G) | | |
| Max. Average Optical Power | W | 0.3, 0.5, 1, 2, 3, 5, 10 | | 15, 20 |
| Max. Peak Power for pulse | kW | 0.1, 1, 2, 3, 5, 10, 15, 20 | | |
| Operating Temperature | °C | 0~50 | | |
| Storage Temperature | °C | -40~85 | | |
| Package | Stainless Steel Tube (SST) | mm | (Ø)5.5x35 (≤5W); (Ø)6.0x48 (5~10W) | |
| Dimension | Metal Box | mm | (L)120x(W)12x(H)10 | |

Note: 1. Specifications are for device without connectors; Specifications may change without notice.


2. To add connectors, IL is 0.3dB higher, RL is 5dB lower.

3. Suggest to use Y or X type if blocked optical power is >1W.

4. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.

5. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (H STAGE)

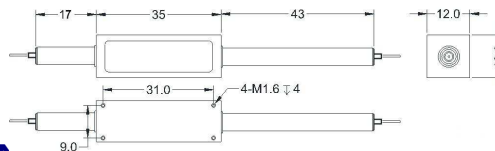

ORDERING INFORMATION (PIN)

FHBI-1570-**C** **NN** **C** - (**C**) (**C**) -**H** **NN** **P** **NN** -(**C**) (**C**) **C** **NN** -**CC/CCC**

| Stage | Bandwidth | ASE Type | 3rd Port Fiber | 4th Port Fiber | Average Power | Peak Power | Package | Fiber Type | Fiber Sleeve | Fiber Length | Connector Type |
|-----------------|-----------|------------|------------------|--------------------|---------------|------------|---------------|------------------------|---------------|--------------|-------------------------|
| S= Single Stage | 40=4nm | F= Forward | Y=Same Fiber | Y=Same Fiber | 03=300mW | 01=100W | M= Metal Box | O=10/130 DC Fiber | B= Bare fiber | 05=0.5m | N=Without Connector |
| D= Dual Stage | 90=9nm | B=Backward | 5=50/125um Fiber | 5=50/125um Fiber | 1= 1W | 1= 1kW | Blank for SST | T=12/130 DC Fiber | L= Loose Tube | 10=1.0m | FC/APC=FC/APC Connector |
| H= H Stage | 150=15nm | T=Twin | Blank for D Type | Blank for D&Y Type | 5= 5W | 5= 5kW | or >10W | G=25/300 DC Fiber | 2= 2mm Cable | 15=1.5m | LC/PC=LC/PC Connector |
| | | | | | 10=10W | 10=10kW | | Blank for SMF-28 Fiber | 3= 3mm Cable | 20=2.0m | SC/UPC=SC/UPC Connector |

