

## 915/1064nm Mini-Size PM WDM/Isolator Hybrid for Pulse Power

### FEATURES

- High Isolation
- Epoxy-Free Optical Path
- High Reliability and Stability

### APPLICATIONS



- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks

### SPECIFICATIONS

Parameters	Unit	Value	
Signal Wavelength Range $\lambda_1$	nm	1064+/-10	
Pump Wavelength Range $\lambda_2$	nm	915+/-10	
Insertion Loss@23°C	Signal Channel@ $\lambda_1$	dB	$\leq 2.9$
	Pump Channel@ $\lambda_2$	dB	$\leq 1.0$
Signal Isolation (23°C, All SOP)	dB	$\geq 22$	
Wavelength Isolation	Signal Channel@ $\lambda_2$	dB	$\geq 25$
	Pump Channel@ $\lambda_1$	dB	$\geq 12$
Optical Return Loss	dB	$\geq 45$	
Extinction Ratio	dB	$\geq 18$	
Working Mode	S Type	-	Can only work in Slow Axis
	F Type	-	Can work both in Slow Axis and Fast Axis
Fiber Type	Common and Signal Port	-	PM850 Fiber, PM980 Fiber or PM1060L Fiber (E) 10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W) 20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
	Pump Port (915nm)	-	Same Fiber, Corr. SM Fiber, PM850 Fiber, HI780 Fiber, PM980 Fiber (M) or HI1060 Fiber (X)
Fiber Tensile Load	N	5	
Max. Signal Average Optical Power	W	0.5, 1	2, 3, 4, 5
Max. Pump Average Optical Power	W	0.3, 0.5, 1, 2, 3, 5, 10	
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-40~85	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
  - To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
  - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

### PACKAGE DIMENSION

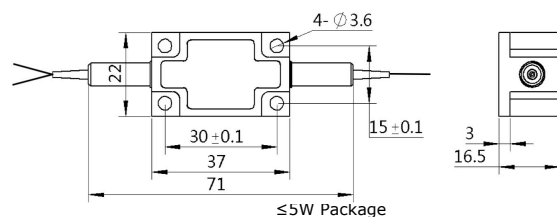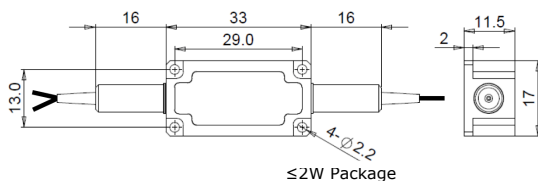

### ORDERING INFORMATION (PN)

Pump Type	Work Mode	Pump Fiber	Average Power	Peak Power	Pump Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
F= Forward	S= S Type	P=PM850 Fiber	05=500mW	01=100W	05=500mW	2=PM850Fiber	B= Bare fiber	05=0.5m	N=Without Connector
B=Backward	F= F Type	Y=Same Fiber	1= 1W	1= 1kW	1=W	H=PM980 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
		S=Corr. SM Fiber	2= 2W	10= 10kW	10=W	E=PM1060L Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
		H=HI780 Fiber	5=5W	20=20kW	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UFC=SC/UFC Connector