

960~1000nm High Power Dual Stage PM Isolator

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks

SPECIFICATIONS

Parameter	Unit	High Power Type	
Center Wavelength (λ_c)	nm	975, 980, 990, 1000	
Operating Wavelength Range	nm	+/-10	
Peak Isolation (Typ.)	dB	50	
Min. Isolation (23°C)	dB	40	
Typical Insertion Loss (λ_c , 23°C)	dB	1.0	
Max. Insertion Loss (λ_c , 23°C)	dB	1.6	
Optical Return Loss (Input/Output)	dB	45/45	
Extinction Ratio @ 23°C (Min.)	dB	18	
Working Mode	S Type	-	Can only work in Slow Axis
	F Type	-	Can work both in Slow Axis and Fast Axis
Configuration	-	-	Standard: 2-Port; Y Type: 3-Port, Backward Power Guide Out
Fiber Type	Input&Output	-	PM980 Fiber, PM1060L Fiber (E) or PM1060L-FA Fiber (L) 10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W) 20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
	3 rd Port (Y Type)	-	Same Fiber or 105/125um MM Fiber
Fiber Tensile Load	N	-	5
Max. Optical Power (CW)	W	-	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30, 40, 50
Max. Backward Optical Power (CW)	W	-	0.3, 0.5, 1, 2, 3, 5, 10
Operating Temperature	°C	-	0~50
Storage Temperature	°C	-	-20~75

Note: 1. Specifications are for device without connectors; Specifications may change without notice.

2. To add connectors, IL is 0.5dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.

3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.


4. Suggest to use Y type for >20W Optical Power or continuous backward power of $\geq 500\text{mW}$.

5. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of


Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

6. Package dimensions may be different for different fiber type, configuration and optical power.

PACKAGE DIMENSION

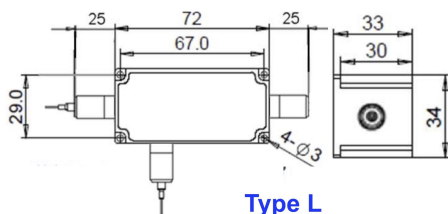

Type L

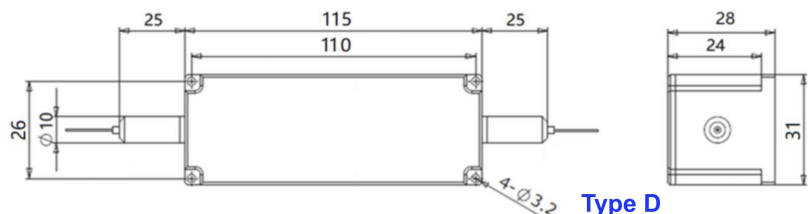

Type D

ORDERING INFORMATION (PN)

FPIS-NNNN	- C	C	(C)	-HPNN	- (NN)	- C	C	NN	- CC/CCC
Center Wavelength	Type	Type	3 rd Port Fiber	Optical Power	Backward Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
980~980nm	L-Type L	S= S Type	Y= Same Fiber	05=500mW	05=500mW	2=PM980Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
975~975nm	D-Type D	F= F Type	A=105/125um Fiber	1=1W	1=1W	E=PM1060L Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
990~990nm			Blank for Standard	10=10W	10=10W	Q=20/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
1000~1000nm				30=30W	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

