

Fiber Pigtailed Tap PhotoDiode for Pulse Power

FEATURES

- High Responsivity
- Low Dark Current
- High Stability and Reliability

APPLICATIONS


- Optical Networks
- Power Monitoring
- Fiber Sensor

SPECIFICATIONS



Parameter	Unit	Value
Center Wavelength	nm	1310, 1480, 1550, 1590, 1310&1550
Bandwidth	nm	+/-30
Tap Ratio	%	0.01%, 0.1%, 1±0.5%, 2±0.6%, 5±1%, 10%, 20%, 30%, 40%, 50%
Excess Loss	dB	≤0.8
Responsivity@tapped power	mA/W	≥750
Return Loss	dB	≥40
Dark Current (V _R =5V, 70°C)	Bandwidth=2G	≤2.5
	Bandwidth=0.5G	≤10
Capacitance (V _R =5V, 1MHz)	Bandwidth=2G	≤1
	Bandwidth=0.5G	≤8
Work Mode	Standard	-
	U Type	-
Isolation (Output->PD, Only for U Type)	dB	≥25
Fiber Type	-	SMF-28 Fiber or 10/130um DC Fiber (O)
	-	12/130um DC Fiber (T) or 20/130um DC Fiber (Q)
	-	25/250um DC Fiber (R) or 25/300um DC Fiber (G)
Max. Optical Power on PD (CW)	mW	10
Max. Optical Power	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature	°C	0~70
Storage Temperature	°C	-40~85
Soldering Temperature	°C	≤260 (<5s, over 2mm from head)
Absolute Max Reverse Voltage	V	20

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.3dB higher, RL is 5dB lower.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION



Standard TO-46 Package

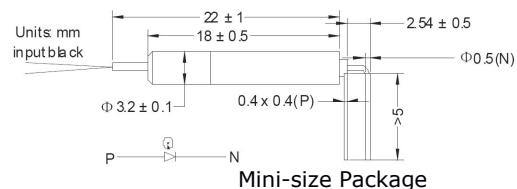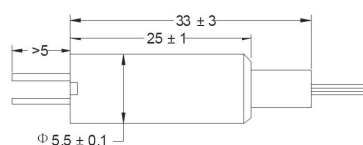

Mini-size Package

ORDERING INFORMATION (PN)

Wavelength	Tap Ratio	Bandwidth	Type	Package	Average Power	Peak Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1550=1550nm	01=1%	20=2G	U=U Type	S=Standard	03=300mW	01=100W	O=10/130 DC Fiber	B= Bare fiber	05=0.5m	N=Without Connector
1310=1310nm	05=5%	05=0.5G	Blank for Standard	M=Mini-size	1=1W	1=1kW	T=12/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
1590=1590nm	10=10%				5=5W	5=5kW	G=25/300 DC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
1315=1310&1550nm	30=30%				10=10W	10=10kW	Blank for SMF-28 Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

