

Fiber Pigtailed PM Tap PhotoDiode for Pulse Power

FEATURES

- ☑ High Responsivity
- ☑ Low Dark Current
- ☑ Wide Passband
- ☑ High Stability and Reliability
- ☑ Epoxy Free Optical Path

APPLICATIONS


- ☑ Optical Amplifier
- ☑ Optical Networks
- ☑ Power Monitoring
- ☑ Fiber Sensor
- ☑ Lab

SPECIFICATIONS

Parameter	Unit	Value	
Center Wavelength	nm	1310, 1480, 1550, 1590, 1310&1550	
Bandwidth	nm	+/-30	
Tap Ratio	%	40dB, 30dB, 1±0.5%, 2±0.6%, 5±1%, 10%, 20%, 30%, 40%, 50%	
Excess Loss	dB	≤0.8	
Responsivity@tapped power	mA/W	≥750	
Return Loss	dB	≥40	
Extinction Ratio	dB	≥20	
Dark Current (V _R =5V, 70°C)	nA	Bandwidth=2G ≤2.5	
		Bandwidth=0.5G ≤10	
Capacitance (V _R =5V, 1MHz)	pF	Bandwidth=2G ≤1	
		Bandwidth=0.5G ≤8	
Work Mode	Standard	-	Light from Output Port may goes to PD
	U Type	-	Isolate Light from Output Port to PD
Isolation (Output->PD, Only for U Type)	dB		≥25
Fiber Type	-		PM1550 Panda Fiber or 10/125um PMSC Fiber (E)
			10/125um PMDC Fiber (O), 12/130um PMDC Fiber (T)
			25/250um PMDC Fiber (R) or 25/300um PMDC Fiber (G)
Max. Optical Power on PD (CW)	mW		10
Max. Average Optical Power	W		0.3, 0.5, 1, 2, 3, 5, 10, 15, 20
Max. Peak Power for pulse	kW		0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature	°C		0~70
Storage Temperature	°C		-40~85
Soldering Temperature	°C		≤260 (<5s, over 2mm from head)
Absolute Max Reverse Voltage	V		20

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

DIMENSION DRAWING

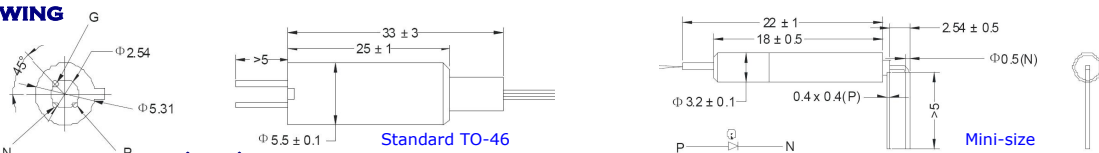

ORDERING INFORMATION (PN)

PTPP-NNNN	- NN	NN	(C)	C	-H NN	PNN	- C	C	NN	-CC/CCC
Wavelength	Tap Ratio	Bandwidth	Type	Package	Average Power	Peak Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1550-1550nm	01=1%	20-2G	U-U Type	S=Standard	03-300mW	01=100W	2-PM1550Fiber	B= Bare fiber	05=0.5m	N=Without Connector
1310-1310nm	05=5%	05=0.5G	Blank for Standard	M=Mini-size	1=1W	1=1kW	E=10/125 PMSC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
1590-1590nm	10=10%				5=5W	5=5kW	T=12/130 PMDC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector
1315=1310&1550nm	30=30%				10=10W	10=10kW	G=25/300 PMDC Fiber	3=3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector