1040nm High Power 3-port PM Circulator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- **Epoxy-Free Optical Path**
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- **WDM Systems**
- **Dispersion Compensation**
- Light Routing



Compliant

SPECIFICATIONS

Parameter		Unit	Value			
Center Wavelength		nm	1040			
Operating Wavelength Range		nm	+/-10			
Insertion Loss@ 23 °C (Typ.)		dB	0.8			
(1 → 2 or 2 → 3)	(Max.)	dB	1.6			
Isolation @ 23 °C	(Typ.)	dB	23			
(3 → 2 or 2 → 1)	(Min.)	dB	20			
Work Mode	S Type	-	Can only work in slow axis			
Work Mode	F Type	-	Can work both in slow axis and fast axis			
Optical Return Loss		dB	≥45			
Extinction Ratio		dB	18			
			PM980 Fiber, PM1060L Fiber (E) or PM1060L-FA Fiber (L)			
Fiber Type		-	10/125um PMDC Fiber (O) or 15/130um PMDC Fiber (W)			
			20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)			
Fiber Tensile Load		N	5			
Max. Average Optical Power		W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30			
Max. Peak Power for pulse		kW	0.1, 1, 2, 3, 5, 10, 15, 20			
Operating Temperature		°C	0~50			
Storage Temperature		°C	-10~65			


Note: 1. Specifications are for device without connectors; Specifications may change without notice.

- 2. To add connectors, IL is 0.5dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
- 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
- 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only

work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

5. Package size maybe different for different fiber type, optical power, etc.

PACKAGE DIMENSION

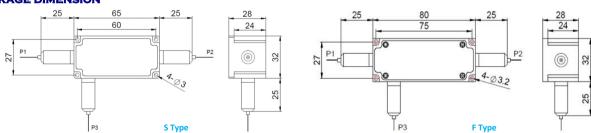

ORDERING INFORMATION (PN)

ORDERING IN ORMANION (1 14)											
FPCR-	NNNN	- (C)	3H NN	P NN	- (NN)	- C	C	NN	- CC/CCC		
	Center Wavelength	Work Mode	Average Power	Peak Power	Average Power P2	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type		
	1040-1040nm	F=F Type	03= 300mW	01=100W	1- 1W	2=PM980Fiber	B= Bare Fiber	05=0.5m	N=Without Connector		
		<i>Blank</i> for S Type	5= 5 Watts	1- 1kW	2- 2W	E=PM1060L Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector		
			10= 10 Watts	5= 5kW	5=5W	Q=20/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector		
			25= 25 Watts	10=10kW	<i>Blank</i> for P2=P1	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector		
									RoHS		