

1550/1625/1650nm High Power WDM Filter

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability
- Various Bandwidth
- High Optical Power

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Laser Systems
- Research Labs



SPECIFICATIONS

Parameters	Unit	Standard	High Isolation
Pass Channel Wavelength Range λ_1	nm	1500-1580	
Reflective Channel Wavelength Range λ_2	nm	1625+/-15, 1620-1660	
Insertion Loss	Pass Channel@ λ_1	≤1.0	
	Reflective Channel@ λ_2	≤0.8	
Configuration	Y Type	3-port	
	X Type	4-port (2x2 WDM)	
Isolation	Pass Channel@ λ_2	≥25	≥45
	Reflective Channel@ λ_1	≥12	
Optical Return Loss	dB	≥45	
Directivity	dB	≥50	
Polarization Dependent Loss	dB	≤0.15	
Fiber Type	-	SMF-28 Fiber, 10/130um DC Fiber (O), 12/130um DC Fiber (T), 20/130um DC Fiber (Q) 25/250um DC Fiber (R), 25/300um DC Fiber (G)	
Fiber Tensile Load	N	5	
Maximum Optical Power (CW)	W	1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60	
Operating Temperature	°C	0~70	
Storage Temperature	°C	-40~85	
Package Dimension	Stainless Steel Tube (SST)	∅5.5x ^L 35 (≤5W); ∅6.0x ^L 50 (5~10W)	
	Metal Box	^L 120x ^W 12x ^H 10 (≤10W)	

Note: 1. Specifications are for device without connectors; Specifications may change without notice.


2. To add connectors, IL is 0.3dB higher, RL is 5dB lower.

3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.

4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of the

Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (>10W)

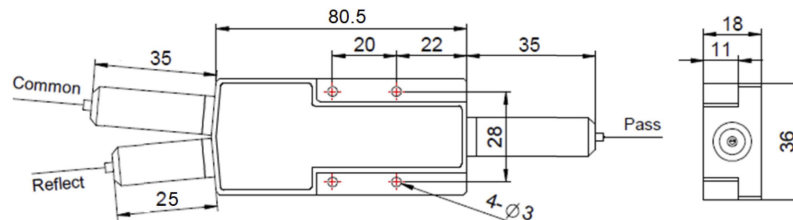

ORDERING INFORMATION (PN)

FFWM-	NN	NN	-(C)	(C)	-HPNN	-(C)	(C)	C	NN	-CC/CCC
Ref Wavelength	Pass Wavelength	Configuration	Isolation	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type	
16=1650nm	15=1550nm	X-X Type	I= High Iso	1=1W	M=Metal Box	O=10/130 DC Fiber	B= Bare Fiber	05=0.5m	N=Without Connector	
62=1625nm	16=1650nm	Blank for Y Type	Blank for	5=5W	Blank for SST	T=12/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector	
15=1550nm	62=1625nm	Standard	Standard	10=10W	or >10W	R=25/250 DC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector	
				20=20W		Blank for SMF-28 Fiber	3=3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector	

