

## 1040nm High Power PM Isolator for Pulse Power

### FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

### APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks



### SPECIFICATIONS

Parameter	Unit	Single Stage	Dual Stage D Type	Dual Stage L Type
Center Wavelength (λc)	nm	1040		
Operating Wavelength Range	nm	+/-10		
Peak Isolation (Typ.)	dB	28	46	
Min. Isolation (23°C)	dB	22	40	
Typical Insertion Loss (λc, 23°C)	dB	0.8	1.0	1.2
Max. Insertion Loss (λc, 23°C)	dB	1.5	1.8	
Optical Return Loss (Input/Output)	dB	50/50		
Extinction Ratio (Min.)	dB	18		
Working Mode	S Type	-	Can only work in Slow Axis	
	F Type	-	Can work both in Slow Axis and Fast Axis	
Configuration	-	Standard: 2-Port; Y Type: 3-Port, Backward Power Guide Out		
Fiber Type	Input&Output	-	PM980 Fiber, PM1060L Fiber (E) or PM1060L-FA Fiber (L)	
			10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W)	
			20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)	
	3 <sup>rd</sup> Port (Y Type)	-	Same Fiber, Corr. SM Fiber or 105/125um MM Fiber	
Fiber Tensile Load	N	5		
Max. Average Optical Power	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20, 30, 50, 60, 80, 100, 150, 200		
Max. Peak Power for Pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20		
Max. Backward Average Power	W	0.3, 0.5, 1, 2, 3, 5, 10		
Operating Temperature	°C	0~50		
Storage Temperature	°C	-20~75		

**Note:** 1. Specifications are for device without connectors; Specifications may change without notice.

2. To add connectors, IL is 0.5dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.


3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.

4. Suggest to use Y type for >20W Optical Power or continuous backward power of ≥500mW.

5. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

6. Package dimensions may be different for different fiber type, configuration and optical power.

### PACKAGE DIMENSION

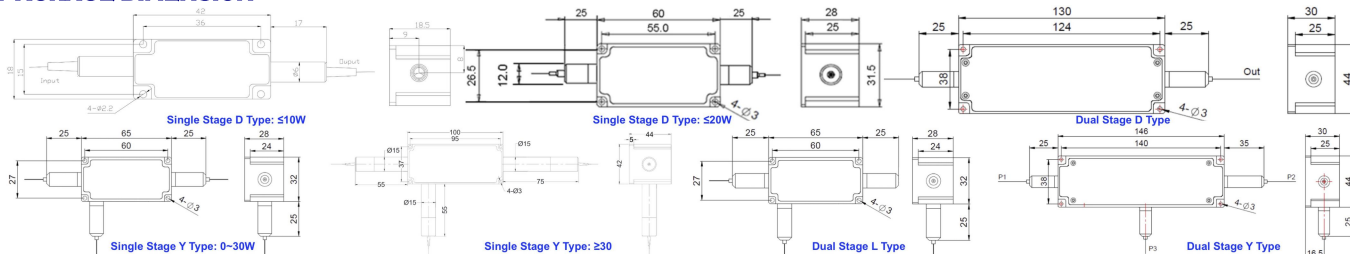

### ORDERING INFORMATION (PN)

FPIS-NNNN	-(C)	C	(C)	-HNN	P NN	-(NN)	- C	C	NN	-CC/CCC
Center Wavelength	Stage	Type	3 <sup>rd</sup> Port Fiber	Average Power	Peak Power	Backward Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1040=1040nm	D=D Type	S=S Type	Y= Same Fiber	05=500mW	01=100W	05=500mW	2=PM980Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
	L=L Type	F=F Type	A=105/125um Fiber	1=1W	1=1kW	1=1W	E=PM1060L Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
	Blank for Single		S=Corr. SM Fiber	10=10W	10=10kW	10=10W	Q=20/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
			Blank for Standard	100=20W	20=20kW	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

